

Rethinking Mobile AI Ecosystem in the LLM Era

Jinliang Yuan*, Chen Yang*, Dongqi Cai*, Shihe Wang, Xin Yuan, Zeling Zhang, Xiang Li, Dingge Zhang, Hanzi Mei, Xianqing Jia, Shangguang Wang, Mengwei Xu
Beijing University of Posts and Telecommunications
China

ABSTRACT

In today’s landscape, smartphones have evolved into hubs for hosting a multitude of deep learning models aimed at local execution. A key realization driving this work is the notable fragmentation among these models, characterized by varied architectures, operators, and implementations. This fragmentation imposes a significant burden on the comprehensive optimization of hardware, system settings, and algorithms.

Buoyed by the recent strides in large foundation models, this work introduces a pioneering paradigm for mobile AI: a collaborative management approach between the mobile OS and hardware, overseeing a foundational model capable of serving a broad spectrum of mobile AI tasks, if not all. This foundational model resides within the NPU and remains impervious to app or OS revisions, akin to firmware. Concurrently, each app contributes a concise, offline fine-tuned "adapter" tailored to distinct downstream tasks. From this concept emerges a concrete instantiation known as M4. It amalgamates a curated selection of publicly available Large Language Models (LLMs) and facilitates dynamic data flow. This concept’s viability is substantiated through the creation of an exhaustive benchmark encompassing 38 mobile AI tasks spanning 50 datasets, including domains such as Computer Vision (CV), Natural Language Processing (NLP), audio, sensing, and multimodal inputs. Spanning this benchmark, M4 unveils its impressive performance. It attains accuracy parity in 85% of tasks, demonstrates improved scalability in terms of storage and memory, and offers satisfactory inference speed on Commercial Off-The-Shelf (COTS) mobile devices fortified with NPU support. This stands in stark contrast to task-specific models tailored for individual applications.

1 INTRODUCTION

Machine learning is revolutionizing mobile applications by facilitating a more automated, intelligent, and efficient interaction between users and devices. These advancements enable humans to enjoy the convenience provided by deep models at all times and locations, from voice assistants [1, 23] to image enhancement tools [75, 88, 92], and augmented reality [10, 64, 105]. As reported in [2, 93], the number of deep

models incorporated within individual devices is growing rapidly, making mobile devices a primary vehicle for AI.

Executing deep models on devices offers benefits in data privacy and service availability but also demands significant resources such as memory, energy, and time. For efficient and scalable on-device execution of these models, a comprehensive co-design approach that integrates hardware, system, and algorithms is needed. However, this task is challenged by the *fragmented ecosystem* of mobile deep models: they significantly differ in architecture, operators, and implementations [8, 19, 30, 38, 76]. This fragmentation, which often results in ad-hoc optimization efforts [3, 63, 71], seems unavoidable. It originates from the complex nature of mobile AI tasks (CV/NLP/TTS/HAR/etc.), multimodal input data from various sensors (camera, screen, microphone, etc.), and diverse application demands (high accuracy, low latency, etc.).

Such fragmentation fundamentally undermines the efficiency of constructing an efficient and scalable mobile AI stack, notably in the three following aspects:

- *Hardware aspect*: it complicates the design of ASIC-based accelerators (NPUs), by forcing difficult trade-offs between generality and performance. §2.2 shows that mobile NPUs can achieve up to a 22× speedup over multi-core CPUs on the Qualcomm Snapdragon 8+ Gen 1 platform. However, this advantage only extends to a small fraction (around 8%) of deep models due to the lack of operator support.
- *OS aspect*: It hampers the system-wise sharing of weights and computations across different applications. Mobile apps often perform similar meta-ML tasks (e.g., object detection for augmented reality, image enhancement, OCR apps), and there exist temporal, spatial, and semantic correlations among the input data [25]. However, exploiting such similarities to reduce memory or computing via cache-reuse is currently impractical, due to the model fragmentation and OSes’ lack of visibility into those models managed at the application level.
- *Software aspect*: It makes library-level optimizations ad-hoc. As noted in [102], there is a wide array of frameworks available to developers, but their performance can vary significantly across different models and devices. No single solution excels universally, often leaving developers struggling to differentiate between them.

Mobile foundation model as firmware. In order to fundamentally tackle the aforementioned issues, we propose a

*These authors contributed equally to this work.

novel paradigm for mobile AI in which the OS and hardware co-manage a foundation model that is capable of addressing most, if not all, mobile AI tasks. This model, akin to firmware, is exposed as a system service to applications similar to the unified ML interface NNAPI [22] in Android. It remains unaltered by apps or the OS. To utilize it, each application embeds it a lightweight "adapter" that is fine-tuned offline for downstream tasks. This approach could greatly simplify NPU design and allow the OS to take control of AI computing across applications, thereby facilitating the sharing of weights, computations, and task scheduling. This vision becomes feasible thanks to recent advancements in the ML community, specifically: (1) The establishment of pre-trained large foundation models [58, 69, 81] that capture extensive knowledge from vast Internet data; (2) The development of algorithms to accurately align multimodal data input [20, 77]; (3) The demonstration of parameter-efficient fine-tuning (PEFT) methods like LoRA [27, 54] that efficiently adapt pre-trained models to diverse downstream tasks.

While the vision is intriguing, there are two key missing pieces to turn it into reality. (1) How to build such a one-size-fits-all foundation model to ubiquitously handle highly diversified, multimodal mobile AI tasks? While research on the multimodal foundation model has achieved impressive progress in recent years, they are still not adequate in our case: most of them [43, 57, 65] handle only a small fixed number of input/output modalities (e.g., text-image) and cannot be flexibly adapted to more; a concurrent effort CoDi [77] with this work enables any-to-any generation across three modalities (image-text-audio), but requires more than 34GBs of on-device storage/memory and does not support IMU sensor data of mobile devices. (2) How to properly evaluate the performance of the proposed foundation model? To our best knowledge, there has been no comprehensive benchmark or a set of standard metrics for mobile AI tasks.

M4: a composable mobile foundation model (§3). We introduce M4, the first architectural design and implementation of a multimodal mobile foundation model. Unlike prior approaches like CoDi that directly use (Nx) heavy encoders to align multimodal input data and (Mx) heavy decoders to generate specific data format, M4 adds a backbone module in between (a "narrow waist") that comprehends and reasons for each downstream task. Through such "N-1-M" design, M4 is able to achieve better accuracy-to-parameter efficiency as compared to traditional "N-M" architecture. Moreover, M4 could be partially activated by various tasks based on their characteristics (input/output modality, the need for complex comprehension, etc.). We have fully prototyped M4 with only pre-trained models publicly available from HuggingFace [90], which guarantees the reproducibility of M4 and also demonstrates its compatibility with the existing LLM ecosystem. Overall, M4 contains 9.2B parameters and

demands 7.5GBs of peak memory footprint. Such a size is only affordable on high-end mobile devices nowadays, but we deem it to be soon feasible for more commons whose memory/storage capacity is significantly increasing yearly.

mAIBench: a comprehensive mobile AI benchmark (§4.1).

To assess M4 and future endeavors, we have constructed the first comprehensive benchmark for diverse mobile AI tasks, named mAIBench. Through an extensive examination of real-world mobile AI and publications in mobile venues, M4 presently includes 38 important mobile AI tasks and 50 classic datasets. The tasks include five different input/output data modalities (vision, text, audio, IMU, and mix). Each task is also linked with a task-specific model, representative of the DNN in the pre-LLM era (e.g., ResNet-152 for image classification [26] and LSTM for input token prediction [29]). We also standardize a set of key metrics to quantify the capability of a foundation model, as will be shown next.

Key results (§4). We then conduct extensive experiments to evaluate M4 using mAIBench on two 8xA100 GPU servers. We summarize our major results and analysis.

- **Ubiquity** – M4 effectively supports most tasks and datasets in mAIBench. Compared with the models tailored for each task, M4 shows comparable accuracy on 85% of the 50 datasets and a significant improvement on 4 of them (including image captioning and text-to-image retrieval). In only six instances does M4 experience nontrivial accuracy degradation, marked by a greater than 10% gap. The system also demonstrates promising zero-shot and few-shot capabilities, achieving usable accuracy on certain tasks without any fine-tuning. Moreover, quantization minimally affects the performance of M4: when reduced to 8 bits on two tested tasks, accuracy degradation ranges only between 0.2% and 0.8%.

- **Scalability** – Despite M4 foundation model’s heavier footprint, its adaptation to downstream mobile tasks is lightweight and therefore more scalable. The current implementation of M4 encompasses ~10 billion parameters, in contrast to the mere 1 million to 500 million parameters found in task-specific models. Nevertheless, the "adapters" of M4 require only 1,000 to 10 million parameters, which enhances scalability across various mobile AI tasks, given that the foundation model is shared. For example, on a device with 12GB of memory, M4 (4-bit quantized) with all 50 adapters can be hosted in memory, eliminating cold-start latency, whereas only 20 of 50 task-specific models would fit the same memory constraints.

- **Velocity** – M4 is much slower than task-specific models, yet the gap might be mitigated through a highly-optimized NPU. On a high-end autonomous board Jetson Orin NX (16GB memory), M4 runs 18× slower on average. We also test the performance of M4 on smartphone CPUs^{*}, which shows

^{*}Currently, M4 cannot run on COTS smartphones GPU/NPU due to the lack of operator support.

that the prediction delay could be too slow, i.e., 2.1 secs to classify an image or 240 msec to generate a token in QA. However, such a performance degradation might be addressed by running M4 on a highly optimized NPU, since existing NPUs already offer up to a 22-fold speedup over CPUs, as mentioned in §2.2.

• **Simplicity** – M4 requires fewer operators for execution, greatly simplifying hardware design. In the ONNX format, M4 utilizes a mere 39 different mathematical operators, in contrast to the cumulative 156 operators required by 50 task-specific models. More impressively, M4 can expand its capabilities using the same number of operators. The traditional approach, on the other hand, continuously introduces new operators [96, 106], thereby complicating NPU design.

In addition to conventional mobile AI tasks, M4 also enables more complex and innovative mobile applications, e.g., a sophisticated assistant capable of processing multimodal input data, understanding user intentions, and responding with precision as demonstrated in §4.7.

Contributions Major contributions are summarized below.

- We delineate a vision for a mobile foundation model, harnessing cutting-edge machine learning techniques to consolidate the mobile AI ecosystem and foster integrated hardware-system co-design.
- We design and prototype the first mobile foundation model with public, pre-trained LLMs.
- We have constructed the first comprehensive mobile AI benchmark, through which our prototype demonstrates significant potential in catering to widespread mobile AI tasks, while exhibiting strong scalability, flexibility, and velocity in its performance.

Open-source We plan to make all materials generated in this work (M4, mAIBench, as well as lessons learned) publicly available to facilitate mobile AI research once published.

2 BACKGROUND AND MOTIVATIONS

2.1 Mobile AI Characteristics

Mobile AI is pervasive. An important trend of AI deployment is the migration of deep learning inference tasks from cloud data centers to smartphones, aiming to minimize user-perceived latency and better preserve data privacy [7, 12, 24]. For instance, it is reported that Android apps embedded with on-device DNNs on the Google Play market have experienced a remarkable 60% growth from February 2020 to April 2021 [2]; Such DL-enhanced apps have been downloaded by users billions of times. Unsurprisingly, mobile devices like smartphones and laptops have become a major carriers of intelligence, where DNN inference happens frequently anywhere anytime even without users being aware of it.

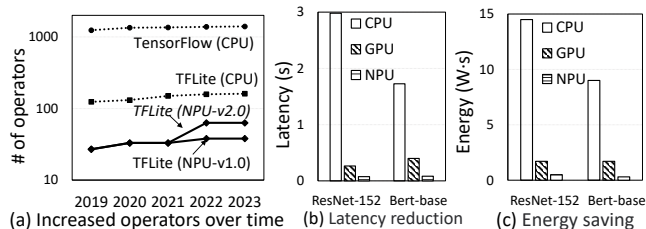


Figure 1: Empirical study on mobile NN processors: (1) A longitudinal analysis of operator support on CPU/NPU; (2) The performance gap between NPU and CPU/GPU on Google Pixel 7 Pro.

Mobile DNNs are fragmented. Unlike cloud AI where each computing unit (e.g., an NVIDIA GPU) only serves one model for user requests [18, 56, 70], a mobile device needs to handle highly diversified mobile AI tasks by itself. Such diversification is inevitable since mobile AI tasks could leverage multimodal sensor data from devices, including imagery data from cameras, audio data from microphones, IMU data from motion sensors, and textual/code data from users typing. Each modality itself has a wide spectrum of applications, e.g., Google Translate for NLP and Apple Siri for Audio. Meanwhile, there are a wide range of cross-modal applications in mobile scenarios: visual question answering [104], image captioning [11], and multimedia content retrieval [49]. For example, the "Search by Text" feature of Google Photos enables users to search for images using arbitrary text queries. Research indicates that the number of such multimodal applications on mobile devices has nearly doubled over the past two years, owing to the rapid advancement of multimodal technologies [95]. As reported in a recent in-the-wild empirical study [2], the DNNs handling different modality data are highly heterogeneous in terms of their architecture and internal operators.

2.2 A Dilemma of Mobile NPU

The fragmented DNNs severely burden the hardware, system, and library design of the mobile AI stack, as discussed in §1. In this subsection, we further highlight the burdens borne by hardware, or more specifically, mobile NPUs. We conduct pilot measurements to reveal the status quo of the mobile NPU ecosystem, focusing on whether they have delivered satisfactory performance gains over accompanying mobile CPU/GPU in running typical mobile DNNs.

The DNN operator support of mobile NPU is significantly lagged behind general-purpose processors. We conducted an investigation on the number of supported NN operators by TensorFlow and TFLite. As illustrated in Figure 1 (a), we have two key observations: (1) The number of NN operator types is still increasing noticeably lately, e.g., from 1240 to 1399 as supported by TensorFlow from 2019 to

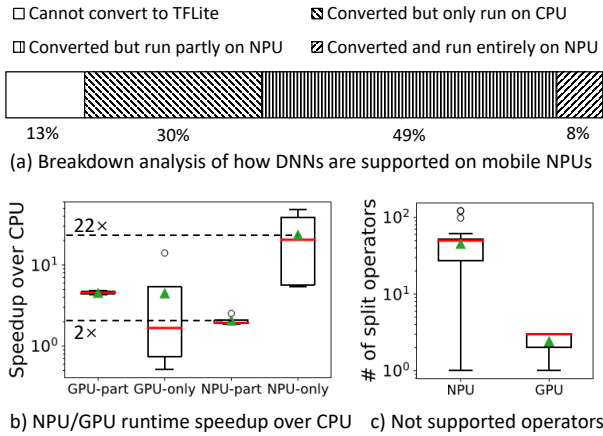


Figure 2: An empirical study of 110 in-the-wild DNNs crawled from public sources on Google Pixel 7 Pro.

2023. Such evolvement of DNN architecture poses significant challenges in designing ubiquitous and efficient mobile NPU design. (2) Mobile chips, especially its NPU, support only a small portion of existing NN operators. TFLite supports less than 160 operators on mobile CPUs, which is nearly 90% fewer than TensorFlow. Furthermore, the number of supported operators by mobile NPU (EdgeTPU on Pixel 7 Pro) is even fewer, i.e., 33 in 2022 and 63 in 2023. Consequently, mobile NPUs might benefit only a small number of DNNs.

For the lucky DNNs fully supported, mobile NPU is able to deliver significant inference speedup and energy reduction compared to mobile CPU/GPU. As an ASIC-based customized processor, mobile NPU is expected to offer faster and more energy-efficient DNN inference. To understand the performance of contemporary mobile NPU, we measure the inference latency and energy consumption of EdgeTPU on Google Pixel 7 Pro. The results are illustrated in Figure 1 (b) and (c). ResNet-152, the NPU achieves an inference latency of only 76ms, which is 39× and 11× faster than the accompanying CPU (4-cores used) and GPU, respectively. Similarly, on BERT-base, the NPU consumes only 0.3J of energy per image, while the CPU and GPU consume significantly higher amounts of energy, i.e., 1.7J (5.78×) and 9.0J (30×), respectively.

However, such significant benefits only apply to a very small portion of in-the-wild popular DNNs. To further understand the ubiquity of mobile NPU, we download more representative DNNs and test their performance. In total, we have found 110 TensorFlow-format DNNs from Model Zoo [97] and HuggingFace [15], prioritized based on their stars and download times. We then try to convert them to TFLite format using the official tool developed by Google and measure their performance on Google Pixel 7 Pro. As shown

in Figure 2 (a), unfortunately, only 8% of those models can entirely run on mobile NPU, while for the rest: 13% fail to be converted to TFLite format; 30% fail to run on mobile NPU; and 49% require CPU-NPU co-running due to the lack of NN operator support by NPU. Figure 2 (b) further illustrates the performance of those DNNs on devices. It reveals that, only the 8% fully supported DNNs gain significant improvement over CPUs (i.e., > 20× median speedup), while the rest (either running partly on GPU/NPU or entirely on GPU) obtain much less profound speedup. In fact, for the DNNs that require CPU-NPU co-running, the inference speed is even not as good as running on mobile GPU. Figure 2 (c) further digs into the reason for such phenomenon: the NPU-incompatible DNNs need to be split into many sub-models to be scheduled between CPU and NPU (e.g., median number of 50); therefore the data movement and format exchange could severely delay the inference.

2.3 Emergence of Foundation Models

This work is motivated by the recent rising of transformer-based foundation models [83].

Foundation models are renovating AI ecosystem; the model design is converging. In recent years, significant advancements have been witnessed in the domain of large-scale neural networks employed for language, image, audio understanding and generation. Representing a milestone achievement, GPT-3 [4] has demonstrated impressive performance across numerous tasks, showcasing its remarkable language comprehension and generation capabilities, thereby opening new avenues in human-computer interaction and intelligent assistance domains. In the visual domain, Meta’s SAM [36] exhibits exceptional zero-shot proficiency and generalization capacity. Besides, there are a few multimodal foundation models such as Kosmos-1 [28] and PaLM-E [9] that are capable of handling inputs from various modalities, enabling them to accomplish even more exciting tasks. All aforementioned models employ the same transformer architecture [83], while only differing in the concrete layer configurations or input modality pre-processing. In the foreseeable future, AI model designs will increasingly converge.

However, there has been no effort in building one model to fit highly diversified mobile AI tasks. None of the aforementioned foundation models is capable of (not even close to) solving all mobile AI tasks. A single modality model (such as GPT for NLP) cannot comprehend or generate data in other modalities. Existing multimodal models (such as CLIP for CV-NLP) can only deal with very limited multimodal AI tasks. One might seek to include a foundation model for each $\langle input : M1, output : M2 \rangle$ pair to solve the above issue, but: (1) It is not parameter-efficient as the comprehension and conversion between different modality

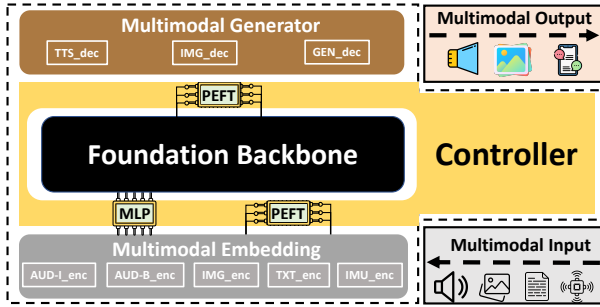


Figure 3: M4 architecture. Only the three green modules are trainable, while the rest are fixed.

data share inherent common sense [43, 65]; (2) It cannot support AI tasks that take multimodal input or output, such as visual question answering [104]. There have been ad-hoc approaches to deal with those issues [74], yet we are not aware of any systematic strategy to build a one-size-fits-all foundation model for diversified mobile AI tasks.

3 M4 DESIGN AND PROTOTYPING

In this section, we present the first design and prototype of a mobile foundation model named M4.

3.1 Overview

Design principles M4 is a one-size-fits-all foundation model for diversified mobile AI tasks. It is designed with following principles: (1) *unified*: instead of building independent foundation models for different possible modalities, M4 provides a unified architecture that maximizes the capability sharing across different modalities, thus being more resource-efficient and extensible; (2) *elastic*: M4 can be easily scaled out to more modalities (either for input or output), e.g., for new types of sensor/app data; (3) *multimodal*: M4 can take multimodal input or generate multimodal output as needed, e.g., for advanced mobile applications like visual question answering or audio caption.

Model architecture Figure 3 illustrates the overall architecture of M4, which consists of three major components:

- *Multimodal Embedding* is to align the contents of different modalities by converting multimodal input data into a unified representation (i.e., a vector). It is typically implemented as a set of transformer encoders [20] for each modality, except that audio has two independent encoders to differentiate the context information (e.g., background noise, speaker emotions) and spoken language (e.g., automatic speech recognition).
- *Foundation Backbone* is to comprehend and reason about the input data. It encapsulates abundant knowledge to understand complex embedded data, performs task-specific

inference, and generates easily intelligible output for generator. It uses a decoder-based architecture trained on huge amount of textual dataset since language has been acknowledged as the most representative type of data [13, 58, 81]. The backbone is the most heavy part of M4.

- *Multimodal Embedding* is to adapt the output from the foundation backbone to task-specific data format. For classification tasks, it is simply a MLP with softmax layer; for image tasks, it is a stable diffusion model [68]; etc.

Trainable parameters M4 contains three trainable parts to be fine-tuned for downstream mobile AI tasks: two PEFT modules inserted to the multimodal embedding and foundation backbone, respectively; and one MLP layer that adapts the output of multimodal embedding to the required representation of the foundation backbone. In later experiments, we use LoRA as the default PEFT method, but also report results for other PEFT methods. As will be demonstrated in §4, the trainable parameter size is trivial compared to the pre-trained part of M4 and is also much smaller than traditional state-of-the-art DNNs.

3.2 Prototyping with Off-the-Shelf LLMs

We have fully prototyped M4 with only pre-trained, off-the-shelf models publicly available from HuggingFace [90]. It guarantees the reproducibility of M4 and also demonstrates its compatibility with the existing LLM ecosystem.

- *Multimodal Embedding*. Multimodal embedding is composed of five parallel modules with transformer encoder-only architecture: *Image (IMG_enc)*, *Text (TXT_enc)*, *Inertial Measurement Unit (IMU_enc)*, *Audio-Background (AUD-B_enc)*, and *Audio-Intent (AUD-I_enc)*. The *IMG_enc* employs the Vision Transformer (ViT) architecture and is utilized to encode visual information derived from input images into a sequential matrix of embeddings. The *TXT_enc* for input text is based on the CLIP architecture with a 12-layer encoder [65]. The *IMU_enc* for IMU data is a lightweight 6-layer encoder transformer model [65]. The *AUD-B_enc* encoder is also derived from ViT and is used for encoding audio backgrounds [21]. The pre-trained weights of the above four encoders are from ImageBind [20] multimodal model. The *AUD-I_enc* encoder is based on a sequence-to-sequence Transformer model for encoding audio intents, with pre-trained weights from Whisper.tiny.en [66].

- *Foundation Backbone*. We use LLaMA-7B (INT8 format) [81], pre-trained on one trillion tokens by Meta, as M4’s backbone. Released in Feb. 2023, LLaMA is a research project aimed at creating a more versatile and efficient language model. It emphasizes training on a broad array of multilingual and multitask supervised data to enhance performance across various natural language processing tasks.

	Types	Params (10^9)	Format	Architecture	GFLOPs
Embedding	IMG_enc [20]	0.6328	FP16	Encoder-only	167.5963
	TXT_enc [20]	0.354	FP16	Encoder-only	23.4189
	AUD-B_enc [20]	0.0862	FP16	Encoder-only	61.4679
	AUD-I_enc [66]	0.037	FP16	Encoder-Decoder	26
	IMU_enc [20]	0.0196	FP16	Encoder-only	5.1417
Backbone	LLaMA [81]	6.28	INT8	Decoder-only	312
	TTS_dec	< 0.01	FP32	Encoder-Decoder	8.58
Generator	IMG_dec [68]	1.0663	FP16	Encoder-Decoder	267
	GEN_dec [81]	< 0.01	FP16	MLP	125.0

Table 1: M4 sub-model parameters.

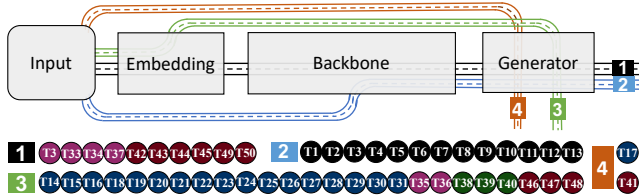


Figure 4: Execution path to each task in Table 3.

• **Multimodal Generator.** Multimodal generator is composed of three parallel decoders: *Text-to-Speech* (TTS_dec), *Image* (IMG_dec) and *Generation* (GEN_dec). The TTS_dec decoder is an integral element within the FAIRSEQ [59], the open-source sequence modeling toolkit released by Meta, tasked with converting the input text into corresponding speech signals. The IMG_dec decoder is a key component of the Diffusion Model, which generates image output from text input. The GEN_dec decoder serves as distinctive entities employed to lead the backbone language model to perform generation tasks, the parameters of which are initialized with the last layer of pre-trained LLaMA. Classification tasks could be reformulated with a generation prompt according to prompt learning literature [48] and re-use the generation decoder GEN_dec . Or it could re-initialize a new MLP decoder according to traditional classification literature.

System complexity Table 1 presents the model complexity of M4’s different modules. The model comprises five types of embeddings (encoders), with parameter sizes ranging from 0.03B to 0.63B, and complexities ranging from 26GFLOPs to 167GFLOPs. The backbone of M4 is LLaMA, with a parameter count of 6.3B, and a complexity of 312GFLOPs. The LLaMA backbone is the largest component (86.1%) in terms of parameter size within the entire model. The generators (decoders) contribute trivially to the overall model size.

3.3 Multi-path Task Execution

Task-specific partial activation of M4. Not every task needs to go through the end-to-end workflow of M4, i.e., embedding-backbone-generator. Inspired by the early-exit inference [39, 79, 107] and multi-path design in hardware [85, 86], we propose a multi-path task execution design for M4. For simpler tasks that can be well solved by only part of M4’s modules, we allow partial activation of M4 to reduce the

computing complexity. In practice, developers could assign specific execution path to different tasks to achieve the best performance. In Figure 4, we have pre-defined 4 paths that can suffice the 50 mobile tasks we have investigated.

- **Path-1** means a full-model activation of M4. Tasks taking this path often require cross-modality alignment and complicated task compression/reasoning. For instance: spoken language understanding and visual question answering.
- **Path-2** activates only the multimodal embedding, often used by tasks that can be accomplished through cross-modality (often language-X) alignment. For instance, image classification aligns the images with their corresponding textual labels (e.g., “cat”); human activity recognition tasks align the IMU data with the textual activity types (e.g., “walking”). In practice, the labels are embedded into a carefully designed prompt as shown below.
- **Path-3** activates only the backbone and generator, mostly used by language tasks since M4’s backbone can directly take raw textual input. For instance: input word prediction and machine translation.
- **Path-4** activates only a specific generator, as taken by very few tasks. For instance: super-resolution can be accomplished by the visual generator (IMG_dec); text-to-speech is accomplished by the speech generator (TTS_dec).

Training details Fine-tuning M4 follows three steps: (1) *input data processing*: NLP tasks take as input the context information along with task-specific descriptive language prompts. CV/Audio/IMU tasks will do alike according to previous work [20]. For more intricate tasks, such as object detection, we utilize a region proposal network to generate a set of object proposals [108]. (2) *tunable weights setting*: For tasks going through backbone (Path 1, 2), only PEFT parameters in backbones are activated while freezing encoder PEFT modules. For discriminative tasks that only go through encoders (Path 3), the encoder PEFT modules will be activated. Linear mapping contacting encoders and backbones will be always activated for shaping alignment. (3) *model weights updating*: During each training iteration, we compute the CrossEntropy loss from actual labels and predicted tokens, utilizing it to update the PEFT/MLP parameters.

Prompt design Two parts of M4 need careful prompt engineering [34, 73, 109] to fully exploit its potential: the text embedding and foundation backbone. We have designed prompts for each mobile AI task in §4.1, and Table 2 lists a few of them as exemplifications.

4 EXPERIMENTS AND ANALYSIS

4.1 Benchmark and Setups

mAIBench: a comprehensive mobile AI benchmark. As the very first effort for a one-size-fits-all mobile foundation

Tasks	Path	Prompts at Text Embedding and Backbone
Image classification	Path-3	[E]: There is a photo of a [Image_label: car].
Machine translation	Path-2	[B]: Translate the following sentences from [SRC_language: en] to [TGT_language: de].
Code generation	Path-2	[B]: Write an assembly code according to the [sentence] requirements.
HAR	Path-3	[E]: The human is [Activity_label: sitting].
Audio captioning	Path-1	[E]: Give a very short caption of the audio, the caption have 16 words at most.
Image captioning	Path-1	[E]: Give a very short caption of the image, the caption have 16 words at most.
Video classification	Path-3	[E]: There is a video of [Video_label: abseiling].
OCR	Path-3	[E]: A [negative / positive] review of a movie.

Table 2: A few prompt examples used in M4. [E] denotes the Text Embedding. [B] denotes the Backbone.

model, a pivotal undertaking is the comprehensive evaluation of its versatility across diverse mobile AI tasks. Therefore, we embark on constructing an exhaustive mobile AI benchmark mAIBench, encompassing 38 tasks spanning 50 public datasets, as shown in Table 3. Those tasks are essential to real-world mobile applications (e.g., translation, object detection, and voice assistant). Many of these tasks have also received substantial attention within the mobile community itself [6, 33, 35, 37, 62, 72, 84, 94, 98, 103]. Each task is accompanied by its designated accuracy metric. mAIBench includes 5 modality domains: NLP, CV, Audio, Sensing (IMU), and Misc (Multimodal). While the majority of tasks are tailored to smartphones, we extend our scope to encompass pivotal devices such as laptops (code generation), autonomous cars (traffic sign classification), and IoT cameras (Counting).

To understand M4’s performance, we select one task-specific model (namely TS-model) for each dataset as a baseline. The selection of these models adheres to two primary criteria: (1) They must remain within the confines of mobile device resource constraints, specifically with fewer than 1 billion parameters; (2) The model accuracy shall be representative to the status quo on mobile devices, though not necessary to be absolute state-of-the-art. Consequently, our model selection draws primarily from two sources: open-source endeavors showcased at prominent mobile conferences like MobiCom and MobiSys during the past five years, and contemporary models showcased on the Paperwithcode platform [61]. A comprehensive list of employed TS-models is provided in Table 3, including instances such as ResNet-152 [26] for image classification, RoBERTa [52] for question answering, and CRDNN [91] for spoken language understanding.

Hardware To obtain the accuracy of M4 as well as TS-models on each dataset, our fine-tuning/testing experiments are performed on two GPU servers, each with 8x NVIDIA A100. In total, our experiments take 100,000 GPU-hours. To understand the runtime performance (memory, latency, energy, etc.) of M4 on real-world devices, we use two typical mobile devices: (1) Pixel 7 Pro smartphone, a high-end smartphone released in Oct. 2022 that has 12GB RAM, 256GB storage,

Octa-core CPU, Mali-G710 MP7 GPU, and an edge TPU. (2) NVIDIA Jetson ORIN NX, a high-end edge board for autonomous robotics or cars released in Feb. 2023 that has 16GB RAM, 64GB storage, and 1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores.

4.2 Overall Accuracy

M4 can well support most mobile AI tasks and datasets.

Figure 5 illustrates M4’s overall performance improvement (or degradation) compared to TS-models. As observed, M4 can achieve comparable performance across 85% of tasks, with over 50% of these tasks showcasing considerable performance improvement. For example on **T1** input word prediction, **T42** audio captioning, and **T46** text-to-image retrieval, M4 yields accuracy increments of 6%, 19%, and 28% respectively. Such commendable improvements are attributed to the well-engineered design of M4, characterized by its unified, adaptive, and multimodal foundation model. While M4’s prowess is manifest, it is prudent to acknowledge marginal performance dips (not surpassing 10%) observed in specific tasks. Instances such as **T2** question answering, **T15** object detection, and **T32** automatic speech recognition exemplify this trend, with accuracy experiencing nominal decrements of 1%, 5%, and 2%, respectively. However, even in these cases, M4 remains viable for deployment with usable performance. Additionally, M4 only showcases diminished performance in 4 tasks, with accuracy drop-offs of up to 20%. The reason behind this reduction stems from the unique requirements of certain low-resource translation tasks, necessitating extensive language knowledge that isn’t inherently embedded within the current foundation model’s pre-training phase.

M4 can be further enhanced with enhanced foundation models.

Figure 6 illustrates the performance improvement realized by M4 through the integration of the latest LLaMA2, in comparison to LLaMA. LLaMA2, a refined evolution of its precursor, LLaMA, introduces heightened capabilities and marked improvements [81]. Released in July 2023, LLaMA2 marks a substantial leap forward, expanding the context window and ushering in the innovation of grouped-query attention. This novel architectural element empowers the model with rapid information processing capabilities. As observed, M4 using LLaMA2 attains a remarkable 15% accuracy enhancement and a 2% improvement in BLEU scores for **T5** emoji prediction and **T42** image caption tasks, respectively. This prowess is attributed to LLaMA2’s optimized architectural schema, expansive training corpus (comprising 2T tokens), and elevated data quality [81]. As M4 is inherently adaptable to its foundation underpinnings, it seamlessly integrates and capitalizes upon the latest components.

Category	Tasks	Mobile Application	Dataset	Task-specific Models		Accuracy	
				Name	Size (M)		
NLP	Input word prediction T1	Input method (Gboard)	PTB	RNN	1.4	Acc: 0.17	
	Question answering T2 T3	Intelligent personal assistant (Siri)	SQuAD v2.0 TyDi QA	RoBERTa AraELECTRA	37 136	F1: 78.60 F1: 86.62	
	Machine translation T4	Translator (Google Translate)	wmt22 en-de	Transformer	110	BLEU: 0.34	
	Emoji prediction T5	Input method (Gboard)	tweet_eval	RoBERTa	125	Acc: 0.33	
	Emotion prediction T6	Conversational analytics (Clarabridge)	go_emotion	RoBERTa	125	Acc: 0.47	
	Sentiment analysis T7	Conversational analytics (Clarabridge)	tweet_eval	RoBERTa	125	Acc: 0.77	
	Text classification T8 T9	Spam SMS filtering (Truecaller)	ag_news SST2	BERT DistilBERT	110 67	Acc: 0.77 Acc: 0.51	
	Grammatical error correction T10	Writing assistance (Grammarly)	JFLEG	FLAN-t5	801	BLEU: 0.68	
	Text summary T11	Reading assistant (ChatPDF)	CNN Daily Mail	BART	400	BLEU:0.43	
	Code document generation T12	Code editor (Javadoc)	CodeSearchNet	CodeT5-base	220	BLEU:32.9	
Code generation T13	Code editor (Copilot)	Shellcode_IA32	CodeBERT	125	BLEU:91.7		
CV	Object detection T14 T15	Augmented Reality (Google Lens)	COCO LVIS	Libra-rcnn X-Paste	42 952	AP: 0.43 AP: 0.51	
	Image retrieval T16	Image searcher (Google Photos)	Clothes Retrieval	Resnet50-arcface	31.7	Recall: 0.90	
	Super-resolution T17	Video/Image super-resolution (VSCO)	REDS	Real-ESRGAN	16.7	SSIM: 0.83	
	Styler transfer T18	Painting & Beautifying (Meitu)	COCO, Wikiart	StyleFlow	16.8	SSIM: 0.45	
	Semantic segmentation T19 T20	Smart camera (Segmentix)	ADE20K-150 PASCAL VOC 2012	Deeplabv3plus Deeplabv3plus	40 40	mIoU: 0.43 mIoU: 0.90	
	Optical character recognition T21	Intelligent document automation software (OcroLus)	Rendered SST2	CLIP	438	Acc: 0.71	
	Image classification T22 T23	Album management (Google Photos)	CIFAR100 ImageNet	GFNet Resnet-152	54 93	Acc: 0.89 Acc: 0.91	
	Traffic sign classification T24	Intelligent transportation (Waze)	GTSRB	MicronNet	0.43	Acc: 0.98	
	Vehicle re-identification T25	Surveillance camera (AI Re-ID)	Veri776	MSINet	2.3	Rank: 0.96	
	Gender recognition T26	Smart camera (Face++)	Adience	MiVOLO-D1	27.4	Acc: 0.96	
	Location recognition T27	Navigation search (Google Maps)	Country211	CLIP	438	Acc: 0.46	
	Pose estimation T28	AI fitness coach (Keep)	AP-10K	ViTPose	44	Acc: 0.69	
	Video classification T29	Video player (YouTube)	kinetics400	SlowFast	66	Acc: 0.89	
	Counting T30	Smart camera (Fitness Tracking)	Crowd Counting	SASNet	37	MAE: 437	
	Image matting T31	Virtual backgrounds (Zoom)	RefMatte-RW100	MDETR	170	MSE: 0.06	
	Audio	Automatic speech recognition T32	Private assistant (Siri)	LibriSpeech	CTC+attention	120	WER: 3.16%
Spoken language understanding T33 T34		Private assistant (Siri)	FSC SLURP	Transformer CRDNN	39 26.5	WER: 0.37% Acc: 0.82	
Emotion recognition T35		Emoji recommendation (WeChat)	IEMOCAP	ECAPA-TDNN	16	Acc: 0.64	
Audio classification T36		Music discovery (Shazam)	ESC-50	ACDNet	4.74	Acc: 0.87	
Keyword spotting T37		Private assistant (Siri)	Speech command	Cnn-trad-fpool3	0.93	Acc: 0.87	
Sensing	Human activity recognition T38 T39 T40	AI fitness coach (Keep)	Using Smartphones HHAR MotionSense	MLP LIMU-BERT LIMU-BERT	0.28 0.18 0.18	Acc: 0.90 Acc: 0.84 Acc: 0.91	
	Multimodal	Text-to-speech T41	Voice broadcast (WeChat reading)	LJSpeech	Transformer	54	MCD: 3.26
		Audio captioning T42 T43	Hearing-impaired accessibility (Ava)	Clotho AudioSet	Transformer Transformer	8.91 8.91	BLEU: 0.52 BLEU: 0.64
Image captioning T44 T45		Visual-impaired accessibility (Supersence)	MSCOCO'14 Flickr8k	LSTM LSTM	188 188	BLEU: 0.69 BLEU: 0.58	
Text-to-image retrieval T46 T47		Image search (Google Photos)	Flickr8k Flickr30k	CCLM CCLM	500 500	Recall: 0.39 Recall: 0.69	
Audio/Text-to-image generation T48		Art creation (Verb Art)	VGGSound	Wav2clip	466	FID: 99.89	
Visual question answering T49 T50		Visual-impaired accessibility (Answerables)	VQA v2.0 VizWiz	MUTAN MUTAN	218 218	Acc: 0.63 Acc: 0.52	

Table 3: A comprehensive benchmark of mobile AI tasks. Circled abbreviations denotes specific task and dataset.

M4 can efficiently preserve the performance with low-bit quantization. Figure 7 illustrates the performance comparison of M4 using quantized backbone with respect to the TS-model. As observed, M4 using 8-bit (INT8) and 4-bit (INT4) quantization both achieve nearly lossless accuracy, compared to M4 using 16-bit float representation (FP16). For example, on **T8** text classification and **T13** code generation, INT8 and INT4-based M4 achieved only a marginal decrease

in accuracy compared to FP16-based M4, with reductions of 0.2%-0.9% and 0.2%-2%, respectively. The reasonable behind is that large models possess an abundance or even surplus knowledge representation, which contributes to more extensive knowledge even after quantization [16]. Therefore, we consistently employed M4 with the default INT8 quantization of the LLaMA backbone.

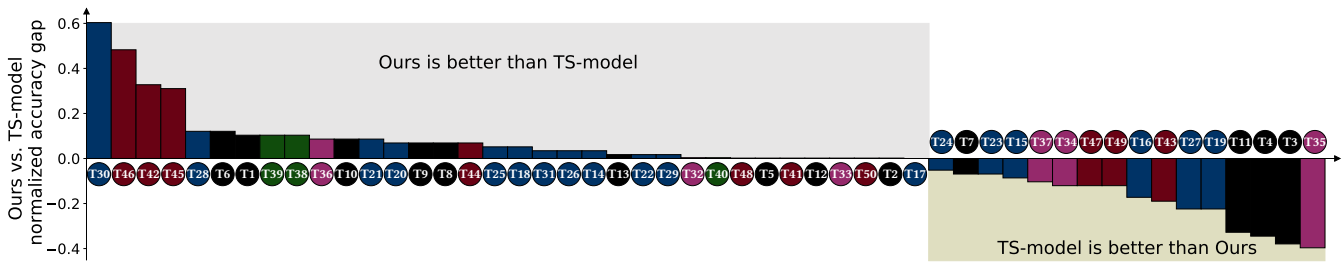


Figure 5: Normalized accuracy comparison of M4 and TS-models on 50 popular mobile tasks and datasets.

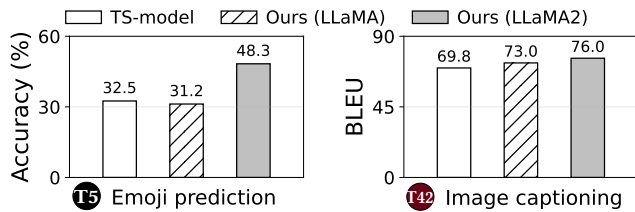


Figure 6: Performance improvement of M4 when replacing LLaMA with LLaMA2 as foundation backbone.

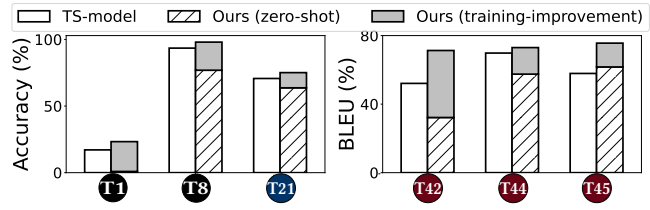


Figure 9: Zero-shot testing of M4 and TS-model.

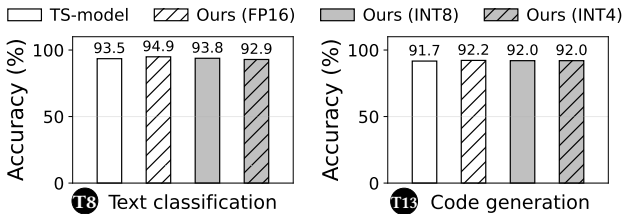


Figure 7: Accuracy of quantized M4 compared with TS-models. FP16/INT8/INT4 represent the numerical representation bit-width employed by LLaMA.

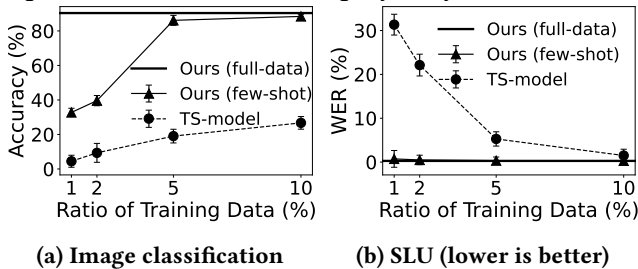


Figure 8: Few-shot testing of M4 and TS-model. SLU: spoken language understanding.

4.3 Zero/Few-shot Ability

We experiment on two tasks, image classification and spoken language understanding. For each task, we follow prior work [5] to randomly select gold labels, with the sample size varying between 1% and 10% of the entire dataset. By default, the labels form a skewed distribution across clients to be more realistic to real-world situations. For each dataset, we conduct 5 repeated experiments and report the mean results.

M4 has better few-shot ability than TS-models that are trained from scratch. In Figure 8, few-shot M4 performs on par with or slightly lower than M4 with full data tuning. Notably, it consistently outperforms TS-model by up to 67.1%. For example on T_{33} , even with a mere 1% sample (equating to just 231 samples), few-shot M4 achieves a Word Error Rate (WER) of 0.7%. It is a mere 0.4% higher than M4 with full data, but 25.4% lower than TS-model that is trained from scratch. This outcome underscores M4’s prowess in leveraging pre-trained multimodal knowledge for swift adaptation to new tasks, even with scarce data.

M4 also has a certain zero-shot ability, but fine-tuning makes it much more accurate. Figure 9 illustrates M4’s zero-shot capabilities on 6 tasks. Evidently, M4 demonstrates commendable zero-shot proficiency, attaining approximately 80% of the TS-model performance in most cases. Notable instances include T_8 , T_{21} , T_{42} and T_{44} , where M4’s zero-shot performance remains acceptably close to the corresponding TS-models, with reductions ranging from 7% to 20%. In certain scenarios, M4 even supersedes the baseline’s zero-shot performance. A prime example lies in T_{45} , where M4 showcases a 4% improvement over TS-models, a testament to the efficacy of prompt learning methodologies. Notwithstanding these accomplishments, the application of fine-tuning to these datasets yields substantial accuracy enhancements for M4, surging by 11%-39%. This improvement arises from M4’s robust attention mechanism-based architecture, facilitating the assimilation of updated knowledge and more effective knowledge transfer across diverse downstream tasks [89].

Tasks	PEFT settings		PEFT results	
	Techniques	Rank	Size (Ratio)	Acc (Dif)
Emoji prediction	LoRA	4	2M (0.03%)	31 (1↓)
Image classification	LoRA	4	8M (0.007%)	90 (1↑)
Human activity recognition	LoRA	1	5M (0.004%)	96 (5↑)
Audio captioning	LoRA	4	4M (0.06%)	72 (19↑)

Table 4: PEFT-enhanced M4’s optimal results. Size (Ratio) denotes the trainable parameter size and its ratio to total parameters. Acc (Dif) denotes the performance of PEFT-enhanced M4 along with the differences compared to TS-model, and the units are %.

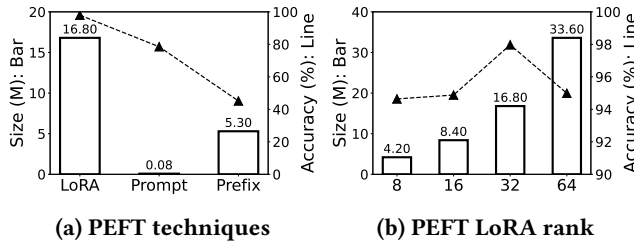


Figure 10: Impact analysis of PEFT-enhanced M4 on text classification. Size (M): trainable parameter size.

4.4 Parameter-efficient Fine-tuning

This subsection examines how PEFT enhances M4’s performance. We analyze the impact of three tuning techniques, along with their key hyper-parameters, on M4’s performance. **A proper PEFT technique and its configuration is crucial to trade off M4 performance and cost.** Table 4 reports the optimal results of M4 on the trade-off between model accuracy and trainable parameter size. Our observations highlight the efficacy of the LoRA tuning technique, paired with well-suited rank settings, in yielding optimal results across a majority of tasks. PEFT-enhanced M4 attains a noteworthy 6% accuracy boost over TS-models, while engaging a mere 0.0253% of parameters for fine-tuning on average. This outcome is driven by M4’s robust pre-training on an expansive dataset, necessitating only minimal parameter adjustments to glean knowledge from task-specific data.

Diving deeper, Figure 10 provides a comprehensive analysis of the impact of diverse PEFT techniques and associated hyper-parameters on the performance of PEFT-enhanced M4. In Figure 10(a), the discernible trend showcases LoRA tuning as a standout performer, surpassing Prompt and Prefix tuning by 19% and 52% in terms of accuracy. Additionally, the fine-tuning process using LoRA mandates a mere 16.8 million trainable parameters, resulting in an exceptionally frugal training cost. Figure 10(b) offers further insights, indicating that selecting an appropriate LoRA rank value plays a pivotal role in propelling M4 towards heightened model accuracy while simultaneously minimizing trainable parameter size. For instance, with the LoRA rank set at 32, M4 attains

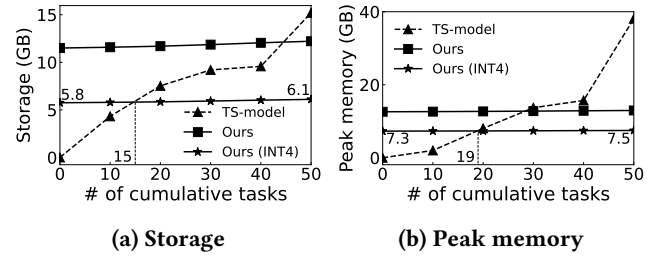


Figure 11: M4’s scalability analysis of storage and peak memory measured on Jetson ORIN.

a commendable accuracy of 98% on the task, leveraging a mere 16.8 million trainable parameters.

4.5 Runtime Cost

This subsection evaluates the storage, peak memory, latency, and energy consumption of running M4 and 50 TS-models on Jetson ORIN and Pixel 7 Pro.

M4 is more storage-efficient when the model number scales out. Figure 11(a) presents a comparative analysis of storage between M4 and TS-models as the task count increases. As observed, M4’s storage footprint is notably greater when serving a limited number of tasks compared to TS-models. However, the narrative changes as task diversity proliferates. With the deployment of a modest number of tasks (e.g. 15 tasks), the storage of M4, specifically those equipped with INT4 quantization, outpaces that of TS-models. This trend intensifies as the number of tasks expands. Ultimately, TS-models surpass the storage allocation of INT4-based M4, culminating at 15.2GB, signifying a substantial 2.5-fold escalation. This underscores M4’s compelling storage scalability.

M4 is memory hungry, but is capable of holding more tasks for warm in-memory inference when task number scales out. Figure 11(b) shows that even when serving 50 tasks simultaneously, the cumulative peak memory usage of INT4-based M4 remains at a modest 7.5GB. This constitutes a mere 2.7% increase, while concurrently yielding a notable 5.1-fold reduction in peak memory consumption compared to TS-models. This exceptional memory efficiency can be attributed to M4’s foundation design, which initially houses all requisite model parameters. Subsequently, the integration of new tasks necessitates only a marginal addition of fine-tuning parameters, typically amounting to less than 10MB each. The 7.5GB of peak memory cannot fit some mobile devices, but it is entirely affordable for many high-end smartphones with 12/16/32GB of RAM, like the Pixel 7 Pro we used. Although the 7.5GB peak memory usage may pose constraints for devices with limited memory capacity, it remains entirely viable for many high-end smartphones equipped with substantial RAM, such as the Pixel 7 Pro utilized in our

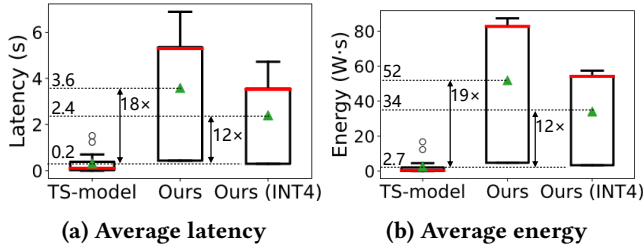


Figure 12: M4’s runtime cost of latency and energy measured on Jetson ORIN (GPU).

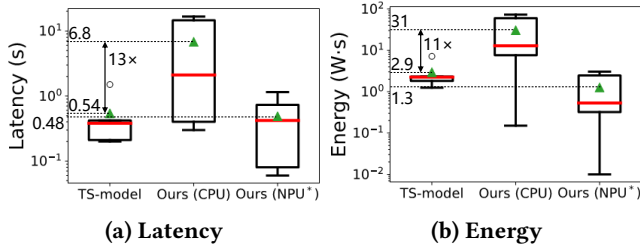


Figure 13: What-if cost analysis of latency and energy when running M4 on Pixel 7 Pro. TS-model: on CPU.

study. This underscores M4’s practicality and potential to be effectively deployed across a spectrum of devices.

M4 is 18× slower and incurs 19× more energy than TS-models on the same processor. Figure 12 provides a comparison of the inference latency and energy consumption between M4 and TS-models across the spectrum of 50 tasks. As observed, M4 using INT8-format LLaMA exhibits 12× and 19× (on average) higher inference latency and more energy consumption, compared to TS-models. While the transition to INT4 quantization offers a marginal amelioration, the performance gap remains significant—a respective 8× increase in latency and 12× surge in energy consumption compared to TS-models. This substantial performance degradation is primarily due to M4’s substantial parameter count and intricate computational demands.

M4 could get on par execution speed as TS-models if it can be deployed to run on the NPU. Figure 13 provides a runtime cost comparison between M4 and TS-models on the CPU and NPU. We obtain the latency and energy of 50 tasks on CPU, denoted as TS-model and Ours (CPU). As observed, M4’s inference latency and energy consumption on CPU are notably 13× and 11× (on average) higher than the TS-models.

Given the substantial performance advantage of NPU over CPU and GPU as shown in §2.2, we aim to evaluate the optimized runtime cost when deploying M4 on the NPU. However, the NPU currently supports a limited set of operators (details in §2.2) and cannot directly execute all components of M4. Therefore, we conduct a what-if analysis to estimate its runtime latency and energy consumption on NPU, denoted

Tasks	Path	Latency (s)	
		CPU	NPU*
Image classification	Path-3	IMG_enc: 2.10	0.11
Audio classification	Path-3	AUD-I_enc: 0.28	0.014
Question answering	Path-2	First token: 6.34	0.32
		Sequent tokens: 0.24/token	0.012/token
Visual question answering	Path-1	First token: 6.47	0.32
		Sequent tokens: 0.25/token	0.013/token
Text-to-speech	Path-4	TTS_dec: 0.82	0.041

Table 5: An in-depth what-if cost analysis of latency when running M4 on Pixel 7 Pro. NPU*: M4’s estimated latency based on the NPU acceleration rate of TS-model if it can be deployed on NPU.

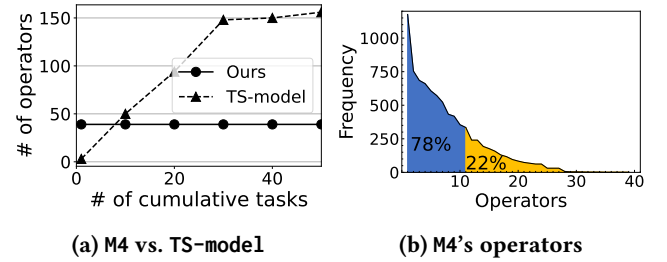


Figure 14: Simplicity analysis of M4’s operators.

as Ours (NPU*), based on the measured performance of TS-models in §2.2. As observed, NPU-enabled M4 achieves an average latency of 0.48s and energy consumption of 1.3J, which are even 11.1% and 55.2% lower than TS-models on CPU. Furthermore, we delve into the architectural intricacies of M4 to analyze the latency breakdown performance in Table 5. From this table, we observe that the latency optimization bottleneck for M4 lies in the time taken by the IMG-encoder and the generation of the first token by the backbone, which is approximately 2.1s and 6.3s, respectively. These components collectively account for 31% and 93% of M4’s average latency (6.8s in Figure 12(a)). However, the other components could exhibit near real-time inference (less than 100ms) if being deployed on NPU. These achievements demonstrate that, if M4 can be accelerated on NPU, it could get on par execution speed and energy consumption with TS-models.

4.6 Model Architecture Simplicity

We convert all models into ONNX format, which enabled us to facilitate an analysis of their usage during execution. **M4’s architectural design is much simpler and cleaner in terms of NN operators, therefore could greatly simplify accelerator design.** Figure 14(a) shows that the number of operators in the TS-models increases rapidly with the growth in the number of tasks. Notably, as the task spectrum broadens to encompass 50 tasks, the number of operator types culminates at 156. In contrast, M4 engages a mere 39 operator types, encompassing both foundation model and

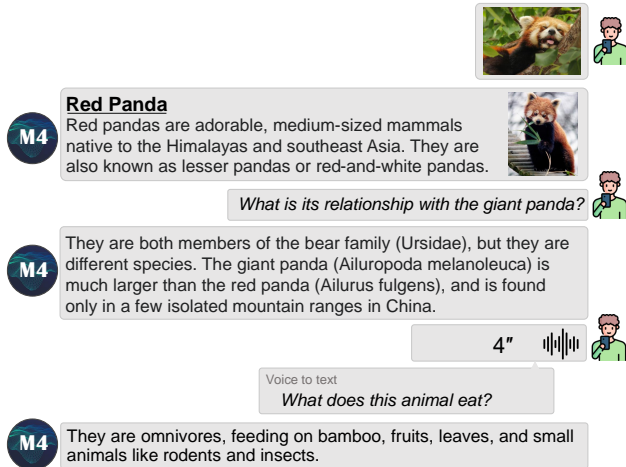


Figure 15: A demo of M4: multimodal chat.

task-specific "adapters". Furthermore, Figure 14(b) undertakes a granular exploration of operator usage frequency. It underscores that a mere 11 operator types within M4 exhibit usage frequencies exceeding 78%, whereas the majority of operators manifest markedly lower usage frequencies. This phenomenon emanates from M4's transformer-based architecture, which inherently involves fewer operators, thus enhancing operational efficiency [63].

4.7 Novel Application with M4

M4 enables complex, unrepresent mobile applications. Based on our proposed M4, we build a demo of a multimodal chat use case as shown in Figure 15. Users engage in multi-turn chats with the M4 client using multimodal inputs such as images, text, and audio, thereby obtaining precise and tailored answers that meet their requirements. We build this prototype system of M4 based on the architecture depicted in Figure 3. It first aligns the contents of image, text, and audio by converting multimodal input data into a unified representation. Then, it encapsulates abundant knowledge to understand complex embedded data, perform task-specific inference, and generate the required information. This innate capability for multimodal processing harbors the potential to significantly enrich the landscape of mobile applications. By way of example, it stands to enhance accessibility for individuals with visual or hearing impairments.

5 RELATED WORK

Foundation models. Building one-for-all foundation models to serve generic AI tasks has been a primary research goal of the machine learning community. The recent advancements of LLMs [4, 17, 32, 55, 58, 60, 67, 69, 78, 80–82, 100], multimodalities alignment [20, 28, 41–43, 57, 65, 74, 77], and parameter-efficient training methods [27, 40, 44, 47, 50, 51,

54, 89, 99, 101] have shed lights on this challenging goal. For instance, ImageBind [20] and CoDi [77] focus on how to align the embeddings of each modality, and PandaGPT [74] further attempts to compose semantics from different modalities naturally based on LLaMA [81]. However, there have been no efforts like M4 that try to fit extremely diversified AI tasks into one model. Meanwhile, M4 leverages the most state-of-the-art pre-trained LLMs to reuse the wisdoms as well as the investments from the ML community&industry. **Hardware-system-algorithm co-design for mobile AI.** AI workloads are highly compute-intensive and exhibit analogous patterns, therefore is better to be accelerated domain-specific accelerator (e.g., NPUs). For instance, SpAtten [86] and Sanger [53] focus on how efficient algorithm-architecture co-designs can reduce sparse attention computation and memory access. Besides, QNAS [45] and NAAS [46] focus on composing highly matched neural-hardware architectures by jointly searching for neural network architecture, accelerator architecture, and compiler mapping. However, all prior literature makes tradeoffs between the ubiquity of operator support and the performance, instead of for a foundation model that can serve generic AI tasks itself. The vision of the mobile foundation model could open a new research domain for cross-layer co-design of mobile AI.

Managing AI as a mobile system service. AI has been a ubiquitous workload on mobile devices, and managing it at a system aspect (instead of individual app) could facilitate OS-wise runtime scheduling and software deployment. Some early studies [14, 31, 87, 94, 102] attempt to mitigate the severe fragment across different libs in the mobile DL ecosystem. Google also introduced a unified ML interface NNAPI [22] into Android framework in 2017, to relieve the gap between heterogeneous mobile processors and user-defined ML frameworks. Compared to the above work, M4 takes another giant step further that mobile devices shall manage a foundation model for each ML task and expose it as firmware.

6 CONCLUSIONS AND FUTURE WORK

We envision a mobile hardware-OS co-managed multimodal foundation model that is exposed to mobile applications as a system service to serve almost every on-device AI task. We design and prototype the first such model using off-the-shelf LLMs. Evaluated on a comprehensive benchmark consisting of 50 representative mobile AI tasks, M4 shows good accuracy on par with models tailored for each task. M4 also shows potential in better scalability and reduced runtime cost through its shared weights and operator simplicity.

To be noted, M4 is the very first step towards the vision of mobile foundation model. We believe it could potentially revolutionize the mobile AI landscape and open a new research domain. However, to fully realize the vision, there are a few

key designs to be explored. For instance: (1) *Foundation model design*: As a preliminary prototype, M4 is currently built atop off-the-shelf, separately pre-trained LLMs from Internet instead of being tailored for mobile devices. Therefore, it is still highly inefficient in terms of accuracy and model parameter size. With enough resources (GPUs and data), hardware vendors can build a more compact mobile foundation model that is expected to deliver significantly higher accuracy with lower runtime cost than M4. (2) *Accelerator design*: fine-tuning for downstream tasks generates small “adapters” that are inserted into the mobile foundation model. The NPU better has the flexibility to run those adapters as well; otherwise the inference must involve CPU/GPU computation and data movement overhead. Fortunately, the adapters have simple structure (e.g., linear matrix operations) and very few weights. (3) *FM upgrading*: the foundation model capacity could evolve with better architecture/weights as shown in §4.2. Yet the adapters trained for the old foundation model cannot work with the new one. We therefore need a unified interface between LLMs and adapters to allow them to evolve independently without interfering with each other.

REFERENCES

- [1] How apple personalizes siri without hoovering up your data. <https://www.technologyreview.com/2019/12/11/131629/apple-ai-personalizes-siri-federated-learning/>, 2019.
- [2] Mario Almeida, Stefanos Laskaridis, Abhinav Mehrotra, Lukasz Dudziak, Ilias Leontiadis, and Nicholas D Lane. Smart at what cost? characterising mobile deep neural networks in the wild. In *Proceedings of the 21st ACM Internet Measurement Conference*, pages 658–672, 2021.
- [3] Manoj Alwani, Han Chen, Michael Ferdman, and Peter Milder. Fused-layer cnn accelerators. In *2016 49th Annual IEEE/ACM International Symposium on Microarchitecture (MICRO)*, pages 1–12. IEEE, 2016.
- [4] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [5] Dongqi Cai, Yaozong Wu, Shangguang Wang, Felix Xiaozhu Lin, and Mengwei Xu. Fedadapter: Efficient federated learning for modern nlp. *arXiv preprint arXiv:2205.10162*, 2022.
- [6] Qingqing Cao, Noah Weber, Niranjan Balasubramanian, and Aruna Balasubramanian. Deqa: On-device question answering. In *Proceedings of the 17th Annual International Conference on Mobile Systems, Applications, and Services*, pages 27–40, 2019.
- [7] Xingyu Chen, Yufeng Liu, Yajiao Dong, Xiong Zhang, Chongyang Ma, Yanmin Xiong, Yuan Zhang, and Xiaoyan Guo. Mobrecon: Mobile-friendly hand mesh reconstruction from monocular image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20544–20554, 2022.
- [8] Yinpeng Chen, Xiyang Dai, Dongdong Chen, Mengchen Liu, Xiaoyi Dong, Lu Yuan, and Zicheng Liu. Mobile-former: Bridging mobilenet and transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5270–5279, 2022.
- [9] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*, 2022.
- [10] Matthew Corbett, Brendan David-John, Jiacheng Shang, Y Charlie Hu, and Bo Ji. Bystander: Protecting bystander visual data in augmented reality systems. In *Proceedings of the 21st Annual International Conference on Mobile Systems, Applications and Services*, pages 370–382, 2023.
- [11] Marcella Cornia, Lorenzo Baraldi, and Rita Cucchiara. Show, control and tell: A framework for generating controllable and grounded captions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8307–8316, 2019.
- [12] Weihao Cui, Han Zhao, Quan Chen, Hao Wei, Zirui Li, Deze Zeng, Chao Li, and Minyi Guo. {DVABatch}: Diversity-aware {Multi-Entry}{Multi-Exit} batching for efficient processing of {DNN} services on {GPUs}. In *2022 USENIX Annual Technical Conference (USENIX ATC 22)*, pages 183–198, 2022.
- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [14] Amin Eslami Abyane and Hadi Hemmati. Robustness analysis of deep learning frameworks on mobile platforms. In *IFIP International Conference on Testing Software and Systems*, pages 160–177. Springer, 2021.
- [15] Hugging Face. Hugging face. <https://huggingface.co/>, 2023.
- [16] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [17] Xinyang Geng, Arnav Gudibande, Hao Liu, Eric Wallace, Pieter Abbeel, Sergey Levine, and Dawn Song. Koala: A dialogue model for academic research. *Blog post, April*, 1, 2023.
- [18] X Yu Geoffrey, Yubo Gao, Pavel Golikov, and Gennady Pekhimenko. Habitat: A {Runtime-Based} computational performance predictor for deep neural network training. In *2021 USENIX Annual Technical Conference (USENIX ATC 21)*, pages 503–521, 2021.
- [19] Petko Georgiev, Nicholas D Lane, Kiran K Rachuri, and Cecilia Mascolo. Leo: Scheduling sensor inference algorithms across heterogeneous mobile processors and network resources. In *Proceedings of the 22nd Annual International Conference on Mobile Computing and Networking*, pages 320–333, 2016.
- [20] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. Imagebind: One embedding space to bind them all. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15180–15190, 2023.
- [21] Yuan Gong, Yu-An Chung, and James Glass. Ast: Audio spectrogram transformer. *arXiv preprint arXiv:2104.01778*, 2021.
- [22] Google. Android neural networks api. <https://github.com/android/ndk-samples/tree/main/nn-samples>, 2017.
- [23] Filip Granqvist, Matt Seigel, Rogier Van Dalen, Aine Cahill, Stephen Shum, and Matthias Paulik. Improving on-device speaker verification using federated learning with privacy. *Proceedings of International Speech Communication Association*, 2020.
- [24] Arpan Gujarati, Reza Karimi, Safya Alzayat, Wei Hao, Antoine Kaufmann, Ymir Vigfusson, and Jonathan Mace. Serving {DNNs} like clockwork: Performance predictability from the bottom up. In *14th USENIX Symposium on Operating Systems Design and Implementation (OSDI 20)*, pages 443–462, 2020.
- [25] Peizhen Guo and Wenjun Hu. Potluck: Cross-application approximate deduplication for computation-intensive mobile applications. In *Proceedings of the Twenty-Third International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 271–284, 2018.

- [26] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [27] Edward J Hu, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, et al. Lora: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2021.
- [28] Shaohan Huang, Li Dong, Wenhui Wang, Yaru Hao, Saksham Singhal, Shuming Ma, Tengchao Lv, Lei Cui, Owais Khan Mohammed, Qiang Liu, et al. Language is not all you need: Aligning perception with language models. *arXiv preprint arXiv:2302.14045*, 2023.
- [29] Zhiheng Huang, Wei Xu, and Kai Yu. Bidirectional lstm-crf models for sequence tagging. *arXiv preprint arXiv:1508.01991*, 2015.
- [30] Loc N Huynh, Youngki Lee, and Rajesh Krishna Balan. Deepmon: Mobile gpu-based deep learning framework for continuous vision applications. In *Proceedings of the 15th Annual International Conference on Mobile Systems, Applications, and Services*, pages 82–95, 2017.
- [31] Andrey Ignatov, Radu Timofte, William Chou, Ke Wang, Max Wu, Tim Hartley, and Luc Van Gool. Ai benchmark: Running deep neural networks on android smartphones. In *Proceedings of the European Conference on Computer Vision (ECCV) Workshops*, pages 0–0, 2018.
- [32] Yunjie Ji, Yong Deng, Yan Gong, Yiping Peng, Qiang Niu, Baochang Ma, and Xiangang Li Belle. Belle: Be everyone’s large language model engine. <https://github.com/LianjiaTech/BELLE>, 2023.
- [33] Shiqi Jiang, Zhiqi Lin, Yuanchun Li, Yuanchao Shu, and Yunxin Liu. Flexible high-resolution object detection on edge devices with tunable latency. In *Proceedings of the 27th Annual International Conference on Mobile Computing and Networking*, pages 559–572, 2021.
- [34] Zhengbao Jiang, Frank F Xu, Jun Araki, and Graham Neubig. How can we know what language models know? *Transactions of the Association for Computational Linguistics*, 8:423–438, 2020.
- [35] Liuyi Jin, Tian Liu, Amran Haroon, Radu Stoleru, Michael Middleton, Ziwei Zhu, and Theodora Chaspari. Emsassist: An end-to-end mobile voice assistant at the edge for emergency medical services. In *Proceedings of the 21st Annual International Conference on Mobile Systems, Applications and Services*, pages 275–288, 2023.
- [36] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. *arXiv preprint arXiv:2304.02643*, 2023.
- [37] Rui Kong, Yuanchun Li, Yizhen Yuan, and Linghe Kong. Convrelu++: Reference-based lossless acceleration of conv-relu operations on mobile cpu. In *Proceedings of the 21st Annual International Conference on Mobile Systems, Applications and Services*, pages 503–515, 2023.
- [38] Nicholas D Lane, Sourav Bhattacharya, Petko Georgiev, Claudio Forlivesi, Lei Jiao, Lorena Qendro, and Fahim Kawsar. Deepx: A software accelerator for low-power deep learning inference on mobile devices. In *2016 15th ACM/IEEE International Conference on Information Processing in Sensor Networks (IPSN)*, pages 1–12. IEEE, 2016.
- [39] Stefanos Laskaridis, Alexandros Kouris, and Nicholas D Lane. Adaptive inference through early-exit networks: Design, challenges and directions. In *Proceedings of the 5th International Workshop on Embedded and Mobile Deep Learning*, pages 1–6, 2021.
- [40] Brian Lester, Rami Al-Rfou, and Noah Constant. The power of scale for parameter-efficient prompt tuning. *arXiv preprint arXiv:2104.08691*, 2021.
- [41] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597*, 2023.
- [42] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International Conference on Machine Learning*, pages 12888–12900. PMLR, 2022.
- [43] Junnan Li, Ramprasaath Selvaraju, Akhilesh Gotmare, Shafiq Joty, Caiming Xiong, and Steven Chu Hong Hoi. Align before fuse: Vision and language representation learning with momentum distillation. *Advances in neural information processing systems*, 34:9694–9705, 2021.
- [44] Xiang Lisa Li and Percy Liang. Prefix-tuning: Optimizing continuous prompts for generation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing*, pages 4582–4597, 2021.
- [45] Yujun Lin, Driss Hafdi, Kuan Wang, Zhijian Liu, and Song Han. Neural-hardware architecture search. *NeurIPS WS*, 2019.
- [46] Yujun Lin, Mengtian Yang, and Song Han. Naas: Neural accelerator architecture search. In *2021 58th ACM/IEEE Design Automation Conference (DAC)*, pages 1051–1056. IEEE, 2021.
- [47] Haokun Liu, Derek Tam, Mohammed Muqeeth, Jay Mohta, Tenghao Huang, Mohit Bansal, and Colin A Raffel. Few-shot parameter-efficient fine-tuning is better and cheaper than in-context learning. *Advances in Neural Information Processing Systems*, 35:1950–1965, 2022.
- [48] Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9):1–35, 2023.
- [49] Song Liu, Haoqi Fan, Shengsheng Qian, Yiru Chen, Wenkui Ding, and Zhongyuan Wang. Hit: Hierarchical transformer with momentum contrast for video-text retrieval. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11915–11925, 2021.
- [50] Xiao Liu, Kaixuan Ji, Yicheng Fu, Zhengxiao Du, Zhilin Yang, and Jie Tang. P-tuning v2: Prompt tuning can be comparable to fine-tuning universally across scales and tasks. *arXiv preprint arXiv:2110.07602*, 2021.
- [51] Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. Gpt understands, too. *arXiv preprint arXiv:2103.10385*, 2021.
- [52] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [53] Liqiang Lu, Yicheng Jin, Hangrui Bi, Zizhang Luo, Peng Li, Tao Wang, and Yun Liang. Sanger: A co-design framework for enabling sparse attention using reconfigurable architecture. In *MICRO-54: 54th Annual IEEE/ACM International Symposium on Microarchitecture*, pages 977–991, 2021.
- [54] Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, and Sayak Paul. Peft: State-of-the-art parameter-efficient fine-tuning methods. <https://github.com/huggingface/peft>, 2022.
- [55] Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M Saiful Bari, Sheng Shen, Zheng-Xin Yong, Hailey Schoelkopf, et al. Crosslingual generalization through multitask finetuning. *arXiv preprint arXiv:2211.01786*, 2022.
- [56] Harini Muthukrishnan, David Nellans, Daniel Lustig, Jeffrey A Fessler, and Thomas F Wenisch. Efficient multi-gpu shared memory via automatic optimization of fine-grained transfers. In *2021 ACM/IEEE 48th Annual International Symposium on Computer Architecture (ISCA)*, pages 139–152. IEEE, 2021.
- [57] Ivona Najdenkoska, Xiantong Zhen, and Marcel Worring. Meta learning to bridge vision and language models for multimodal few-shot

- learning. *arXiv preprint arXiv:2302.14794*, 2023.
- [58] OpenAI. Gpt-4 technical report. <https://cdn.openai.com/papers/gpt-4.pdf>, 2023.
- [59] Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. fairseq: A fast, extensible toolkit for sequence modeling. *arXiv preprint arXiv:1904.01038*, 2019.
- [60] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744, 2022.
- [61] paperswithcode. Paper with code. <https://paperswithcode.com/>, 2023.
- [62] Seonghoon Park, Yeonwoo Cho, Hyungchol Jun, Jeho Lee, and Hojung Cha. Omniliive: Super-resolution enhanced 360° video live streaming for mobile devices. In *Proceedings of the 21st Annual International Conference on Mobile Systems, Applications and Services*, pages 261–274, 2023.
- [63] Suchita Pati, Shaizeen Aga, Nuwan Jayasena, and Matthew D Sinclair. Demystifying bert: System design implications. In *2022 IEEE International Symposium on Workload Characterization (IISWC)*, pages 296–309. IEEE, 2022.
- [64] Siddhant Prakash, Alireza Bahremand, Linda D Nguyen, and Robert LiKamWa. Gleam: An illumination estimation framework for real-time photorealistic augmented reality on mobile devices. In *Proceedings of the 17th Annual International Conference on Mobile Systems, Applications, and Services*, pages 142–154, 2019.
- [65] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [66] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. In *International Conference on Machine Learning*, pages 28492–28518. PMLR, 2023.
- [67] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551, 2020.
- [68] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [69] Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, et al. Bloom: A 176b-parameter open-access multilingual language model. *arXiv preprint arXiv:2211.05100*, 2022.
- [70] Haichen Shen, Lequn Chen, Yuchen Jin, Liangyu Zhao, Bingyu Kong, Matthai Philipose, Arvind Krishnamurthy, and Ravi Sundaram. Nexus: A gpu cluster engine for accelerating dnn-based video analysis. In *Proceedings of the 27th ACM Symposium on Operating Systems Principles*, pages 322–337, 2019.
- [71] Yongming Shen, Michael Ferdman, and Peter Milder. Maximizing cnn accelerator efficiency through resource partitioning. *ACM SIGARCH Computer Architecture News*, 45(2):535–547, 2017.
- [72] Cong Shi, Xiangyu Xu, Tianfang Zhang, Payton Walker, Yi Wu, Jian Liu, Nitesh Saxena, Yingying Chen, and Jiadi Yu. Face-mic: inferring live speech and speaker identity via subtle facial dynamics captured by ar/vr motion sensors. In *Proceedings of the 27th Annual International Conference on Mobile Computing and Networking*, pages 478–490, 2021.
- [73] Taylor Shin, Yasaman Razeghi, Robert L Logan IV, Eric Wallace, and Sameer Singh. Autoprompt: Eliciting knowledge from language models with automatically generated prompts. *arXiv preprint arXiv:2010.15980*, 2020.
- [74] Yixuan Su, Tian Lan, Huayang Li, Jialu Xu, Yan Wang, and Deng Cai. Pandagpt: One model to instruction-follow them all. *arXiv preprint arXiv:2305.16355*, 2023.
- [75] Yanan Sun, Chi-Keung Tang, and Yu-Wing Tai. Semantic image matting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11120–11129, 2021.
- [76] Zhiqing Sun, Hongkun Yu, Xiaodan Song, Renjie Liu, Yiming Yang, and Denny Zhou. Mobilebert: a compact task-agnostic bert for resource-limited devices. *arXiv preprint arXiv:2004.02984*, 2020.
- [77] Zineng Tang, Ziyi Yang, Chenguang Zhu, Michael Zeng, and Mohit Bansal. Any-to-any generation via composable diffusion. *arXiv preprint arXiv:2305.11846*, 2023.
- [78] Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [79] Surat Teerapittayanon, Bradley McDanel, and Hsiang-Tsung Kung. Branchynet: Fast inference via early exiting from deep neural networks. In *2016 23rd international conference on pattern recognition (ICPR)*, pages 2464–2469. IEEE, 2016.
- [80] Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Yu Du, et al. Llama: Language models for dialog applications. *arXiv preprint arXiv:2201.08239*, 2022.
- [81] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [82] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruiti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [83] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [84] Dan Wang, Haibo Lei, Haozhi Dong, Yunshu Wang, Yongpan Zou, and Kaishun Wu. What you wear know how you feel: An emotion inference system with multi-modal wearable devices. In *Proceedings of the 26th Annual International Conference on Mobile Computing and Networking*, pages 1–3, 2020.
- [85] Hanrui Wang, Yongshan Ding, Jiaqi Gu, Yujun Lin, David Z Pan, Frederic T Chong, and Song Han. Quantumnas: Noise-adaptive search for robust quantum circuits. In *2022 IEEE International Symposium on High-Performance Computer Architecture (HPCA)*, pages 692–708. IEEE, 2022.
- [86] Hanrui Wang, Zhekai Zhang, and Song Han. Spatten: Efficient sparse attention architecture with cascade token and head pruning. In *2021 IEEE International Symposium on High-Performance Computer Architecture (HPCA)*, pages 97–110. IEEE, 2021.
- [87] Haoyu Wang, Hao Li, and Yao Guo. Understanding the evolution of mobile app ecosystems: A longitudinal measurement study of google play. In *The World Wide Web Conference*, pages 1988–1999, 2019.
- [88] Xinlong Wang, Wen Wang, Yue Cao, Chunhua Shen, and Tiejun Huang. Images speak in images: A generalist painter for in-context visual learning. In *Proceedings of the IEEE/CVF Conference on*

- Computer Vision and Pattern Recognition, pages 6830–6839, 2023.
- [89] Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. Fine-tuned language models are zero-shot learners. arXiv preprint arXiv:2109.01652, 2021.
- [90] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. Huggingface’s transformers: State-of-the-art natural language processing. arXiv preprint arXiv:1910.03771, 2019.
- [91] Yusheng Xiang and Marcus Geimer. Optimization of operation strategy for primary torque based hydrostatic drivetrain using artificial intelligence. arXiv preprint arXiv:2003.10011, 2020.
- [92] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. Imagereward: Learning and evaluating human preferences for text-to-image generation. arXiv preprint arXiv:2304.05977, 2023.
- [93] Mengwei Xu, Jiawei Liu, Yuanqiang Liu, Felix Xiaozhu Lin, Yunxin Liu, and Xuanzhe Liu. A first look at deep learning apps on smartphones. In The World Wide Web Conference, pages 2125–2136, 2019.
- [94] Mengwei Xu, Mengze Zhu, Yunxin Liu, Felix Xiaozhu Lin, and Xuanzhe Liu. Deepcache: Principled cache for mobile deep vision. In Proceedings of the 24th annual international conference on mobile computing and networking, pages 129–144, 2018.
- [95] Shukang Yin, Chaoyou Fu, Sirui Zhao, Ke Li, Xing Sun, Tong Xu, and Enhong Chen. A survey on multimodal large language models. arXiv preprint arXiv:2306.13549, 2023.
- [96] Gyeong-In Yu, Joo Seong Jeong, Geon-Woo Kim, Soojeong Kim, and Byung-Gon Chun. Orca: A distributed serving system for {Transformer-Based} generative models. In 16th USENIX Symposium on Operating Systems Design and Implementation (OSDI 22), pages 521–538, 2022.
- [97] Koh Jing Yu. Model zoo. <https://modelzoo.co/>, 2023.
- [98] Mu Yuan, Lan Zhang, Fengxiang He, Xueting Tong, and Xiang-Yang Li. Infi: end-to-end learnable input filter for resource-efficient mobile-centric inference. In Proceedings of the 28th Annual International Conference on Mobile Computing And Networking, pages 228–241, 2022.
- [99] Elad Ben Zaken, Shauli Ravfogel, and Yoav Goldberg. Bitfit: Simple parameter-efficient fine-tuning for transformer-based masked language-models. arXiv preprint arXiv:2106.10199, 2021.
- [100] Aohan Zeng, Xiao Liu, Zhengxiao Du, Zihan Wang, Hanyu Lai, Ming Ding, Zhuoyi Yang, Yifan Xu, Wendi Zheng, Xiao Xia, et al. Glm-130b: An open bilingual pre-trained model. arXiv preprint arXiv:2210.02414, 2022.
- [101] Qingru Zhang, Minshuo Chen, Alexander Bukharin, Pengcheng He, Yu Cheng, Weizhu Chen, and Tuo Zhao. Adaptive budget allocation for parameter-efficient fine-tuning. arXiv preprint arXiv:2303.10512, 2023.
- [102] Qiyang Zhang, Xiang Li, Xiangying Che, Xiao Ma, Ao Zhou, Mengwei Xu, Shangguang Wang, Yun Ma, and Xuanzhe Liu. A comprehensive benchmark of deep learning libraries on mobile devices. In Proceedings of the ACM Web Conference 2022, pages 3298–3307, 2022.
- [103] Wuyang Zhang, Zhezhi He, Luyang Liu, Zhenhua Jia, Yunxin Liu, Marco Gruteser, Dipankar Raychaudhuri, and Yanyong Zhang. Elf: accelerate high-resolution mobile deep vision with content-aware parallel offloading. In Proceedings of the 27th Annual International Conference on Mobile Computing and Networking, pages 201–214, 2021.
- [104] Xi Zhang, Feifei Zhang, and Changsheng Xu. Vqacl: A novel visual question answering continual learning setting. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 19102–19112, 2023.
- [105] Yiqin Zhao and Tian Guo. Xihe: a 3d vision-based lighting estimation framework for mobile augmented reality. In Proceedings of the 19th Annual International Conference on Mobile Systems, Applications, and Services, pages 28–40, 2021.
- [106] Quan Zhou, Haiquan Wang, Xiaoyan Yu, Cheng Li, Youhui Bai, Feng Yan, and Yinlong Xu. Mpress: Democratizing billion-scale model training on multi-gpu servers via memory-saving inter-operator parallelism. In 2023 IEEE International Symposium on High-Performance Computer Architecture (HPCA), pages 556–569. IEEE, 2023.
- [107] Wangchunshu Zhou, Canwen Xu, Tao Ge, Julian McAuley, Ke Xu, and Furu Wei. Bert loses patience: Fast and robust inference with early exit. Advances in Neural Information Processing Systems, 33:18330–18341, 2020.
- [108] Xingyi Zhou, Rohit Girdhar, Armand Joulin, Philipp Krähenbühl, and Ishan Misra. Detecting twenty-thousand classes using image-level supervision. In European Conference on Computer Vision, pages 350–368. Springer, 2022.
- [109] Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. Large language models are human-level prompt engineers. arXiv preprint arXiv:2211.01910, 2022.